


铜管端子 — AWG 喇叭口型铜管端子

适用于一般铜导体

AWG Series Lugs are manufactured from 99.95% oxygen-free high conductivity copper tube.

Bell mouth easily to insert conductor.

According to American standard.

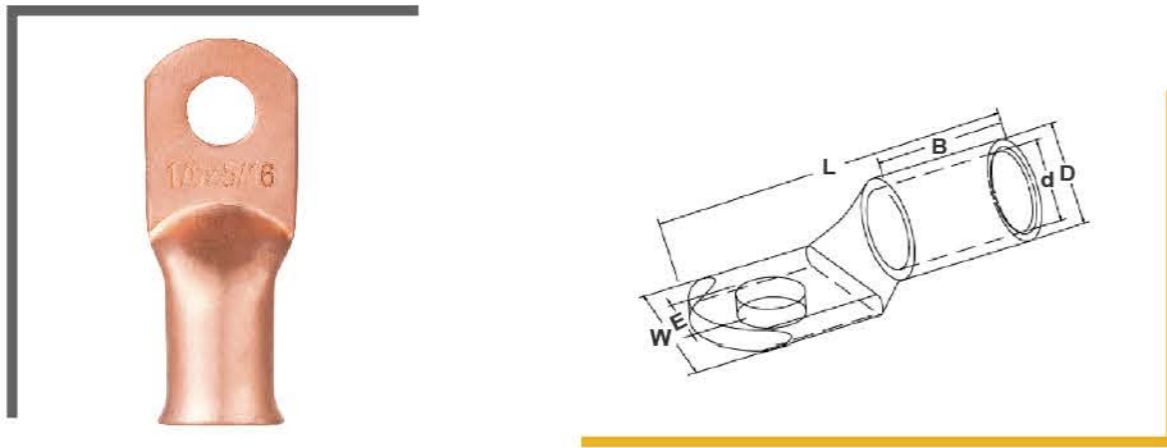

ITEM NO	DIMENSIONS					
	øE	ΦD	Φd	W	B	L
8#10	5.1	7.1	4.8	11.8	13	33.3
8*1/4	6.8	7.1	4.8	11.8	13	33.3
8*5/16	8.3	7.1	4.8	11.8	13	33.3
8*3/8	10.4	7.1	4.8	14.5	13	33.3
8*1/2	13.1	7.1	4.8	17	13	33.3
6#10	5.1	8.1	5.9	11.8	15	37.3
6*1/4	6.8	8.1	5.9	13.7	15	37.3
6*5/16	8.3	8.1	5.9	13.7	15	37.3
6*3/8	10.4	8.1	5.9	13.7	15	37.3
6*1/2	13.1	8.1	5.9	17	14	37.3
4*1/4	6.8	9.5	7.3	13.8	15.5	38.9
4*5/16	8.3	9.5	7.3	13.8	15.5	38.9
4*3/8	10.4	9.5	7.3	14.5	15.5	38.9
4*1/2	13.1	9.5	7.3	17	15	38.9

ITEM NO	DIMENSIONS					
	øE	ΦD	Φd	W	B	L
2*1/4	6.8	11.1	8.5	16.5	16	41.1
2*5/16	8.3	11.1	8.5	16.5	16	41.1
2*3/8	10.4	11.1	8.5	16.5	16	41.1
2*1/2	13.1	11.1	8.5	17	15.3	41.1
1*1/4	6.8	11.7	9.1	16.4	16	43.6
1*5/16	8.3	11.7	9.1	16.4	16	43.6
1*3/8	10.4	11.7	9.1	17.1	16	43.6
1*1/2	13.1	11.7	9.1	19.1	16	43.6
1/01/4	6.8	13	10.4	18.4	19	46.8
1/05/16	8.3	13	10.4	18.4	19	46.8
1/03/8	10.4	13	10.4	18.4	19	46.8
1/01/2	13.1	13	10.4	21	19	46.8
2/01/4	6.8	14.2	11.7	21	22	52.4
2/05/16	8.3	14.2	11.7	21	22	52.4
2/03/8	10.4	14.2	11.7	21	22	52.4
2/01/2	13.1	14.2	11.7	21	21	52.4
3/05/16	8.3	15.7	13	23.1	22.5	55.9
3/03/8	10.4	15.7	13	23.1	22.5	55.9
3/01/2	13.1	15.7	13	23.1	22.5	55.9
4/05/16	8.3	17.2	14.2	25.8	24	60.5
4/03/8	10.4	17.2	14.2	25.8	24	60.5
4/01/2	13.1	17.2	14.2	25.8	24	60.5

