


铜管端子 — SC 窥口型接线端子

适用于柔性铜电缆


SC Series Lugs are manufactured from 99.95% oxygen-free high conductivity copper tube and are electro tinned.

There is an inspection hole to make sure full insertion of conductor.

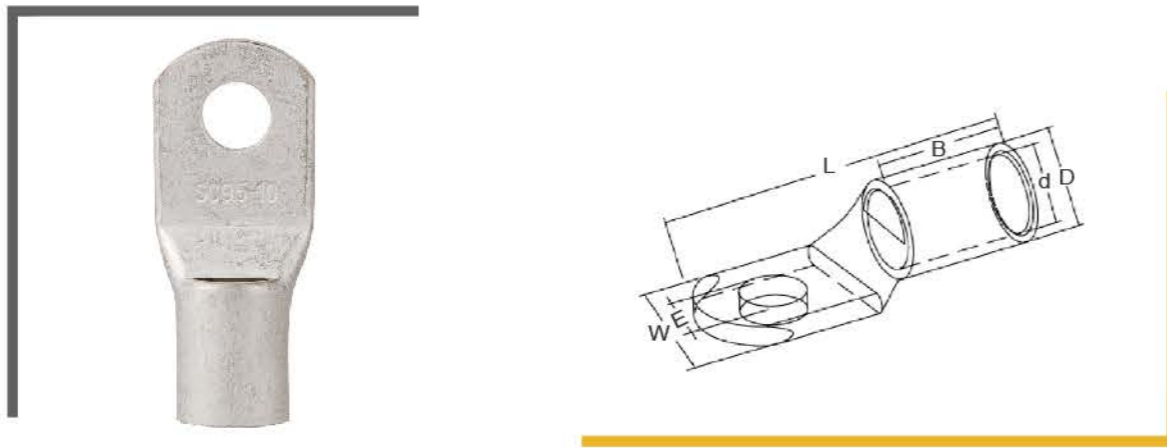

ITEM NO	DIMENSIONS					
	øE	ΦD	Φd	W	B	L
SC1.5-4	4.2	3.6	1.8	8	5	16
SC1.5-5	5.2	3.6	1.8	10	5	17
SC1.5-6	6.5	3.6	1.8	10	5	18
SC2.5-4	4.2	3.9	2.4	8	7	18
SC2.5-5	5.2	3.9	2.4	10	7	20
SC2.5-6	6.5	3.9	2.4	10	7	20
SC2.5-8	8.4	3.9	2.4	12.5	7	23
SC4-4	4.2	4.7	3.1	10	7	20
SC4-5	5.2	4.7	3.1	10	7	20
SC4-6	6.5	4.7	3.1	10	7	20
SC4-8	8.4	4.7	3.1	12.5	7	23
SC6-4	4.2	5.4	3.8	10	9	24
SC6-5	5.2	5.4	3.8	10	9	24
SC6-6	6.5	5.4	3.8	12	9	24
SC6-8	8.4	5.4	3.8	12.5	9	26
SC6-10	10.5	6	4	15	9	28

ITEM NO	DIMENSIONS					
	øE	ΦD	Φd	W	B	L
SC10-5	5.2	6.1	4.5	12	9	25
SC10-6	6.5	6.1	4.5	12	9	25
SC10-8	8.4	6.1	4.5	12.5	9	27
SC10-10	10.5	6.1	4.5	15	9	29
SC10-12	13	6.1	4.5	17	9	31
SC16-5	5.2	7	5.4	12	12	30
SC16-6	6.5	7	5.4	12	12	30
SC16-8	8.4	7	5.4	12.5	12	30
SC16-10	10.5	7	5.4	16	12	33
SC16-12	13	7	5.4	17	12	35
SC25-5	5.2	8.6	6.8	13	12	33
SC25-6	6.5	8.6	6.8	13	12	33
SC25-8	8.4	8.6	6.8	15	12	33
SC25-10	10.5	8.6	6.8	18	12	34
SC25-12	13	8.6	6.8	18	12	35
SC25-14	15	8.6	6.8	20	12	38
SC35-5	5.2	10.4	8.2	16	14	38
SC35-6	6.5	10.4	8.2	16	14	38
SC35-8	8.4	10.4	8.2	16	14	38
SC35-10	10.5	10.4	8.2	18	14	39
SC35-12	13	10.4	8.2	19	14	40.5
SC35-14	15	10.4	8.2	20	14	42
SC50-6	6.5	12.2	9.5	17.8	16	45
SC50-8	8.4	12.2	9.5	17.8	16	45
SC50-10	10.5	12.2	9.5	17.8	16	45
SC50-12	13	12.2	9.5	20	16	45
SC50-14	15	12.2	9.5	22	16	46
SC50-16	17	12.2	9.5	24	16	47
SC70-8	8.4	14.4	11.2	21	20	52
SC70-10	10.5	14.4	11.2	21	20	52
SC70-12	13	14.4	11.2	21	20	52
SC70-14	15	14.4	11.2	21	20	52
SC70-16	17	14.4	11.2	25	20	53
SC95-8	8.4	17.1	13.5	25	23	58
SC95-10	10.5	17.1	13.5	25	23	58
SC95-12	13	17.1	13.5	25	23	58
SC95-14	15	17.1	13.5	25	23	58
SC95-16	17	17.1	13.5	25	23	58

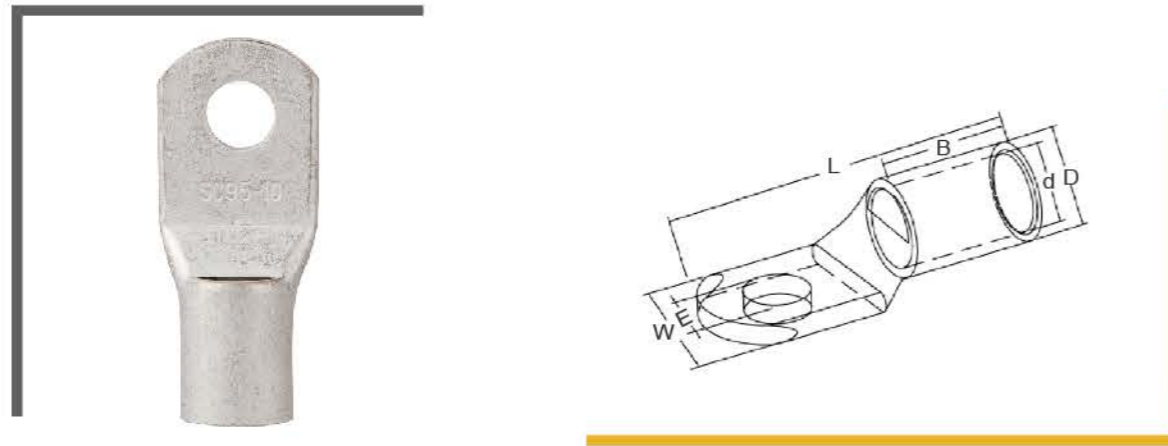

ITEM NO	DIMENSIONS					
	øE	ΦD	Φd	W	B	L
SC120-8	8.4	19	15	27.5	22	63
SC120-10	10.5	19	15	27.5	22	63
SC120-12	13	19	15	27.5	22	63
SC120-14	15	19	15	27.5	22	63
SC120-16	17	19	15	27.5	22	63
SC120-20	21	19	15	27.5	22	63
SC150-8	8.4	20.8	16.5	30	26	70
SC150-10	10.5	20.8	16.5	30	26	70
SC150-12	13	20.8	16.5	30	26	70
SC150-14	15	20.8	16.5	30	26	70
SC150-16	17	20.8	16.5	30	26	70
SC150-20	21	20.8	16.5	30	26	70
SC185-10	10.5	23.1	18.5	33.5	32	75
SC185-12	13	23.1	18.5	33.5	32	75
SC185-14	15	23.1	18.5	33.5	32	75
SC185-16	17	23.1	18.5	33.5	32	75
SC185-20	21	23.1	18.5	33.5	32	75
SC240-10	10.5	26	21	38	38	90
SC240-12	13	26	21	38	38	90
SC240-14	15	26	21	38	38	90
SC240-16	17	26	21	38	38	90
SC240-18	19	26	21	38	38	90
SC240-20	21	26	21	38	38	90
SC300-10	10.5	29.4	23.5	43	42	98
SC300-12	13	29.4	23.5	43	42	98
SC300-14	15	29.4	23.5	43	42	98
SC300-16	17	29.4	23.5	43	42	98
SC300-20	21	29.4	23.5	43	42	98

ITEM NO	DIMENSIONS					
	øE	ΦD	Φd	W	B	L
SC400-10	10.5	35.8	28.5	52	44	110
SC400-12	13	35.8	28.5	52	44	110
SC400-14	15	35.8	28.5	52	44	110
SC400-16	17	35.8	28.5	52	44	110
SC400-20	21	35.8	28.5	52	44	110
SC500-10	10.5	38.2	30	55	48	120
SC500-12	13	38.2	30	55	48	120
SC500-14	15	38.2	30	55	48	120
SC500-16	17	38.2	30	55	48	120
SC500-20	21	38.2	30	55	48	120
SC630-10	10.5	44.1	35	63.5	56	140
SC630-12	13	44.1	35	63.5	56	140
SC630-14	15	44.1	35	63.5	56	140
SC630-16	17	44.1	35	63.5	56	140
SC630-20	21	44.1	35	63.5	56	140

