



DOIN ELECTRIC

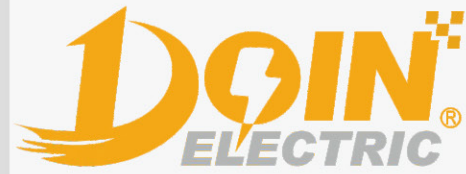



DEXIN ELECTRIC TECHNOLOGY



www.doinele.com

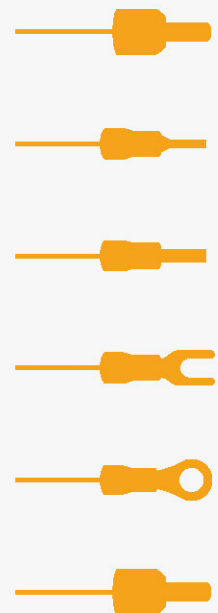

Fully insulated Female disconnect terminals

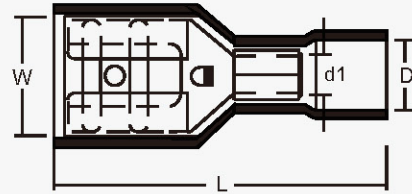

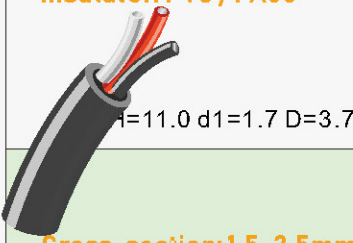Available range	Single Grip	Double Grip	Tab Size	Dimensions(mm)		
				W	L	T
Cross-section: 0.75-1.5mm² A.W.G.: 22-16 I_{max}=10A Surface handling: Tin / 3μ Insulator colour: Red Insulator: PVC / PA66  H=11.0 d1=1.7 D=3.7	FDFD 1.25-110(5)	FDFG 1.25-110(5)	2.8×0.5	3.2	19.0	0.3
	FDFD 1.25-110(8)	FDFG 1.25-110(8)	2.8×0.8			
	FDFD 1.25-187(5)	FDFG 1.25-187(5)	4.75×0.5	5.0	20.5	0.35
	FDFD 1.25-187(8)	FDFG 1.25-187(8)	4.75×0.8			
	FDFD 1.25-250	FDFG 1.25-250	6.35×0.8	6.6	21.8	0.4
Cross-section: 1.5-2.5mm² A.W.G.: 16-14 I_{max}=15A Surface handling: Tin / 3μ Insulator colour: Blue Insulator: PVC / PA66 H=11.0 d1=2.3 D=4.2	FDFD 2-110(5)	FDFG 2-110(5)	2.8×0.5	3.2	19.0	0.3
	FDFD 2-110(8)	FDFG 2-110(8)	2.8×0.8			
	FDFD 2-187(5)	FDFG 2-187(5)	4.75×0.5	5.0	20.2	0.35
	FDFD 2-187(8)	FDFG 2-187(8)	4.75×0.8			
	FDFD 2-250	FDFG 2-250	6.35×0.8	6.6	22.2	0.4
Cross-section: 6-6mm² A.W.G.: 12-10 I_{max}=24A Surface handling: Tin / 3μ Insulator colour: Yellow Insulator: PVC / PA66 H=11.0 d1=3.4 D=5.6	FDFD 5.5-250	FDFG 5.5-250	6.35×0.8	6.6	24.2	0.4

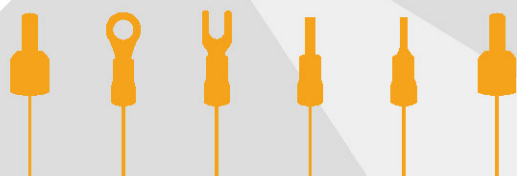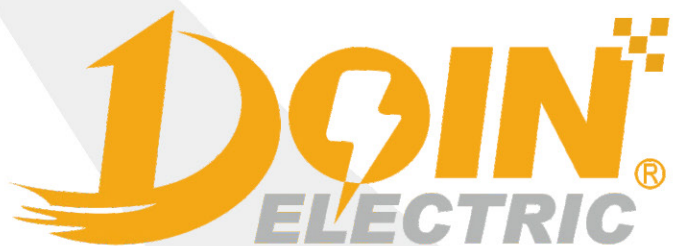

WENZHOU DEXIN ELECTRIC TECHNOLOGY CO., LTD

www.doinele.com

Add: No.1888 Feihong S.Road, 325608 Wenzhou City, Zhejiang Provice R.P.C.