



DOIN ELECTRIC

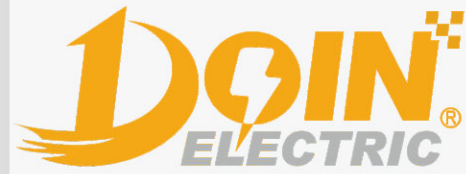


DEXIN ELECTRIC TECHNOLOGY

www.doinele.com

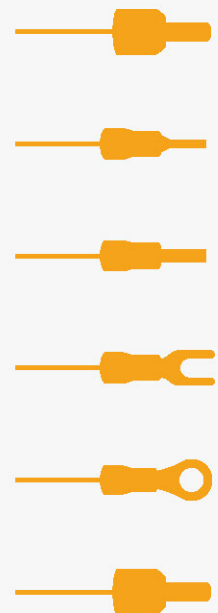

Non-insulated Ring terminals

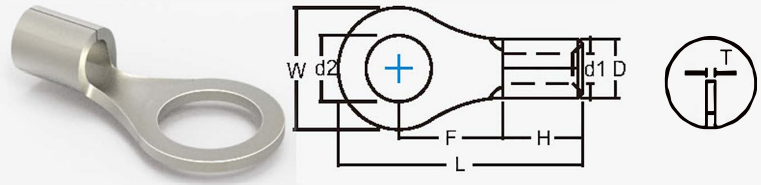

Available range	Item No.	American	Dimensions (mm)				
			d2	W	F	L	
Cross-section: 0.75-1.5mm² A.W.G.: 22-16 I_{max}=19A Surface handling: Tin / 3μ Annealing: Yes	M3	RNB1.25-3.2	#4	3.2	5.5	5.00	12.5
	M3.5	RNB1.25-3.7S	#6	3.7			
	M3.5	RNB1.25-3.7M	#6	3.7	6.6	6.3	14.4
	M3.5	RNB1.25-3.7L	#6	3.7	8.0	7.0	15.8
	M4	RNB1.25-4S	#8	4.3	8.0	7.0	15.8
	M4	RNB1.25-4L	#8	4.3			
	M5	RNB1.25-5	#10	5.3	11.6	11.0	21.8
	M5	RNB1.25-5L	#10	5.3			
	M6	RNB1.25-6	1/4"	6.4	13.6	13.9	25.5
	M8	RNB1.25-8	5/16"	8.4			
	M8	RNB1.25-8L	5/16"	8.5	27.0	21.0	39.3
	M10	RNB1.25-10	3/8"	10.5			
	M12	RNB1.25-12	1/2"	13.0	27.0	21.0	39.3
	M14	RNB1.25-14	9/16"	15.0			
M16	RNB1.25-16	5/8"	17.0	27.0	21.0	39.3	
M20	RNB1.25-20	3/4"	21.0				
Cross-section: 1.5-2.5mm² A.W.G.: 16-14 I_{max}=27A Surface handling: Tin / 3μ Annealing: Yes	M3	RNB2-3.2S	#4	3.2	6.6	4.8	12.8
	M3	RNB2-3.2	#4	3.2			
	M3.5	RNB2-3.7	#6	3.7	8.5	7.40	16.5
	M3.5	RNB2-3.7M	#6	3.7			
	M3.5	RNB2-3.7L	#6	3.7	8.5	7.40	16.5
	M4	RNB2-4S	#8	4.3			
	M4	RNB2-4L	#8	4.3	12.0	11.0	21.8
	M5	RNB2-5S	#10	5.3			
	M5	RNB2-5L	#10	5.3	13.6	13.9	25.5
	M6	RNB2-6	1/4"	6.4			
	M8	RNB2-8	5/16"	8.4	27.0	21.0	39.3
	M8	RNB2-8L	5/16"	8.5			
	M10	RNB2-10	3/8"	10.5	27.0	21.0	39.3
	M12	RNB2-12	1/2"	13.0			
M14	RNB2-14	9/16"	15.0	27.0	21.0	39.3	
M16	RNB2-16	5/8"	17.0				
M20	RNB2-20	3/4"	21.0				
Cross-section: 2.5-4mm² A.W.G.: 14-12 I_{max}=37A Surface handling: Tin / 3μ Annealing: Yes	M4	RNB3.5-4	#8	4.3	8.0	8.00	18.0
	M5	RNB3.5-5S	#10	5.3			
	M5	RNB3.5-5L	#10	5.3	12.0	9.4	21.4
	M6	RNB3.5-6	1/4"	6.4			
	M8	RNB3.5-8	5/16"	8.4	15.0	13.3	27.0
	M10	RNB3.5-10	3/8"	10.5			
	M12	RNB3.5-12	1/2"	13.0	19.2	16.0	31.6
M14	RNB3.5-14	9/16"	15.0				
Cross-section: 4-6mm² A.W.G.: 12-10 I_{max}=48A Surface handling: Tin / 3μ Annealing: Yes	M3	RNB5.5-3.2	#4	3.2	7.2	5.8	15.5
	M3.5	RNB5.5-3.7	#6	3.7			
	M4	RNB5.5-4S	#8	4.3	9.5	8.30	19.0
	M4	RNB5.5-4L	#8	4.3			
	M5	RNB5.5-5	#10	5.3	12.0	10.5	22.5
	M6	RNB5.5-6	1/4"	6.4			
	M6	RNB5.5-6M	1/4"	6.4	15.0	13.3	27.0
	M8	RNB5.5-8	5/16"	8.4			
	M10	RNB5.5-10	3/8"	10.5	19.2	16.0	31.6
	M12	RNB5.5-12	1/2"	13.0			
	M14	RNB5.5-14	9/16"	15.0	32.0	25.2	47.2
	M16	RNB5.5-16	5/8"	17.0			
	M20	RNB5.5-20	3/4"	21.0			




H=4.8 d1=1.7 D=3.4 T=0.8


H=4.8 d1=2.3 D=4.0 T=0.8


H=6.0 d1=2.9 D=5.0 T=1.0


H=6.0 d1=3.4 D=5.5 T=1.0





Available range	Item No.	American	Dimensions (mm)				
			d2	W	F		
Cross-section: 6-10mm² A.W.G.: 8 I_{max}=62A Surface handling: Tin/3μ Annealing: Yes	M3.5	RNB8-3.7	#6	3.7	8.0	9.3	21.5
	M4	RNB8-4S	#8	4.3			
	M4	RNB8-4L	#8	4.3	12.0	9.3	23.8
	M5	RNB8-5S	#10	5.3	8.8	10.5	23.8
	M5	RNB8-5M	#10	5.3	12.0	9.3	23.8
	M5	RNB8-5L	#10	5.3	15.0	13.8	29.8
	M6	RNB8-6S	1/4"	6.4	12.0	9.3	23.3
	M6	RNB8-6L	1/4"	6.4	15.0	13.6	29.2
	M8	RNB8-8	5/16"	8.4			
	M10	RNB8-10	3/8"	10.5			
	M10	RNB8-10L	3/8"	10.5	20.0	15.0	33.5
	M12	RNB8-12	1/2"	13.0			
Cross-section: 10-16mm² A.W.G.: 6 I_{max}=88A Surface handling: Tin/3μ Annealing: Yes	M4	RNB14-4	#8	4.3	12.0	13.3	29.2
	M5	RNB14-5	#10	5.3			
	M6	RNB14-6S	1/4"	6.4			
	M6	RNB14-6L	1/4"	6.4	16.0	14.2	32.5
	M8	RNB14-8	5/16"	8.4			
	M10	RNB14-10	3/8"	10.5			
	M10	RNB14-10L	3/8"	10.5	22.0	19.8	41.0
	M12	RNB14-12	1/2"	13.0	31.6	25.3	51.0
	M14	RNB14-14	9/16"	15.0			
	M16	RNB14-16	5/8"	17.0			
M20	RNB14-20	3/4"	21.0				
Cross-section: 16-25mm² A.W.G.: 4 I_{max}=115A Surface handling: Tin/3μ Annealing: Yes	M4	RNB22-4	#8	4.3	12.2	15.1	33.2
	M5	RNB22-5S	#10	5.3			
	M5	RNB22-5L	#10	5.3	16.5	13.5	33.5
	M6	RNB22-6S	1/4"	6.4	12.2	15.1	33.0
	M6	RNB22-6L	1/4"	6.4	16.5	13.5	33.5
	M8	RNB22-8	5/16"	8.4			
	M10	RNB22-10	3/8"	10.5			
	M10	RNB22-10L	3/8"	10.5	17.5	16.0	36.7
	M12	RNB22-12	1/2"	13.0	22.0	19.7	42.5
	M14	RNB22-14	9/16"	15.0	30.0	24.2	51.0
	M16	RNB22-16	5/8"	17.0	30.0	24.2	51.0
	M20	RNB22-20	3/4"	21.0			
Cross-section: 35mm² A.W.G.: 2 I_{max}=160A Surface handling: Tin/3μ Annealing: Yes	M5	RNB38-5	#10	5.3	15.3	17.4	39.0
	M6	RNB38-6S	1/4"	6.4			
	M6	RNB38-6L	1/4"	6.4	22.0	17.7	42.7
	M8	RNB38-8S	5/16"	8.4	15.3	17.4	39.0
	M8	RNB38-8L	5/16"	8.4	22.0	17.7	42.7
	M10	RNB38-10S	3/8"	10.5	22.0	17.4	39.0
	M10	RNB38-10L	3/8"	10.5			
	M12	RNB38-12	1/2"	13.0			
	M14	RNB38-14	9/16"	15.0	30.0	23.3	52.0
	M16	RNB38-16	5/8"	17.0			
M20	RNB38-20	3/4"	21.0				



Available range	Stud Size	Item No.	American	Dimension (mm)			
				d2	W	L	
Cross-section: 50mm² A.W.G.: 1/0 I_{max}=215A Surface handling: Tin / 3μ Annealing: Yes  H=18 d1=11.4 D=15.4 T=1.8	M6	RNB60-6S	1/4"	6.4	16.0	17.7	43.7
	M8	RNB60-8S	5/16"	8.4			
	M10	RNB60-10S	3/8"	10.5			
	M12	RNB60-12S	1/2"	14.0	19.0	17.7	45.2
	M6	RNB60-6	1/4"	6.5	22.0	20.7	49.7
	M8	RNB60-8	5/16"	8.5			
	M10	RNB60-10	3/8"	10.5			
	M12	RNB60-12	1/2"	13.0			
	M14	RNB60-14	9/16"	15.0	32.0	23.5	57.5
	M16	RNB60-16	5/8"	17.0			
	M18	RNB60-18	11/16"	19.0			
	M20	RNB60-20	3/4"	21.0			
	M22	RNB60-22	7/8"	23.0			
M6	RNB60-6S	1/4"	6.4	17.5			
M8	RNB70-8S	5/16"	8.4				
M10	RNB70-10S	3/8"	10.5				
M12	RNB70-12S	1/2"	13.0	22.0	20.0	50.0	
M6	RNB70-6	1/4"	6.5	24.0	20.0	50.0	
M8	RNB70-8	5/16"	8.5				
M10	RNB70-10	3/8"	10.5				
M12	RNB70-12	1/2"	13.0				
M14	RNB70-14	9/16"	15.0	32.0	26.0	61.0	
M16	RNB70-16	5/8"	17.0				
M18	RNB70-18	11/16"	19.0				
M20	RNB70-20	3/4"	21.0				
M22	RNB70-22	7/8"	23.0				
M6	RNB80-6	1/4"	6.4				27.0
M8	RNB80-8	5/16"	8.4				
M10	RNB80-10	3/8"	10.5				
M12	RNB80-12	1/2"	13.0				
M14	RNB80-14	9/16"	15.0	32.0	32.0	68.0	
M16	RNB80-16	5/8"	17.0				
M18	RNB80-18	11/16"	19.0				
M20	RNB80-20	3/4"	21.0				
M22	RNB80-22	7/8"	23.0				
M6	RNB100-6	1/4"	6.4				28.5
M8	RNB100-8	5/16"	8.4				
M10	RNB100-10	3/8"	10.5				
M12	RNB100-12	1/2"	13.0				
M14	RNB100-14	9/16"	15.0	32.0	32.0	69.0	
M16	RNB100-16	5/8"	17.0				
M18	RNB100-18	11/16"	19.0				
M20	RNB100-20	3/4"	21.0				
M22	RNB100-22	7/8"	23.0				



Available range	Stud Size	Item No.	American	Dimensions (mm)						
				d2	W	F	L ₁			
Cross-section: 125mm² A.W.G.: 4/0 I_{max}=350A Surface handling: Tin/3μ Annealing: Yes H=21 d1=17.8 D=24 T=3.0	M8	RNB125-8	5/16"	8.5	32.0	22.0	62.0			
	M10	RNB125-10	3/8"	10.5						
	M12	RNB125-12	1/2"	13.0						
	Cross-section: 150mm² A.W.G.: 250/300MCM I_{max}=395A Surface handling: Tin/3μ Annealing: Yes H=27 d1=19.5 D=26.6 T=3.2	M14	RNB125-14	9/16"	15.0	32.0	32.0	72.0		
		M16	RNB125-16	5/8"	17.0					
		M20	RNB125-20	3/4"	21.0					
		M22	RNB125-22	7/8"	23.0					
M27		RNB125-27	1"	28.0						
Cross-section: 185mm² A.W.G.: 300/350MCM I_{max}=440A Surface handling: Tin/3μ Annealing: Yes H=28.5 d1=21 D=28.6 T=3.5	M8	RNB150-8	5/16"	8.4	36.0	23.0	66.0			
	M10	RNB150-10	3/8"	10.5						
	M12	RNB150-12	1/2"	13.0						
	M14	RNB150-14	9/16"	15.0						
	M16	RNB150-16	5/8"	17.0						
	M18	RNB150-18	11/16"	19.0						
	M20	RNB150-20	3/4"	21.0						
	Cross-section: 240mm² A.W.G.: 400/500MCM I_{max}=470A Surface handling: Tin/3μ Annealing: Yes H=31.5 d1=24 D=32.6 T=3.9	M22	RNB150-22	7/8"	23.0	36.0	36.0	81.0		
		M24	RNB150-24	15/16"	25.0					
		M27	RNB150-27	1"	28.0					
Cross-section: 300mm² A.W.G.: 500/600MCM I_{max}=650A Surface handling: Tin/3μ Annealing: Yes H=35.5 d1=28 D=37.1 T=4.2	M8	RNB180-8	5/16"	8.4	38.5	24.50	69.0			
	M10	RNB180-10	3/8"	10.5						
	M12	RNB180-12	1/2"	13.0						
	M14	RNB180-14	9/16"	15.0						
	M16	RNB180-16	5/8"	17.0						
	M18	RNB180-18	11/16"	19.0						
	M20	RNB180-20	3/4"	21.0						
	Cross-section: 300mm² A.W.G.: 500/600MCM I_{max}=650A Surface handling: Tin/3μ Annealing: Yes H=35.5 d1=28 D=37.1 T=4.2	M22	RNB180-22	7/8"	23.0	38.5	39.0	86.6		
		M24	RNB180-24	15/16"	25.0					
		M27	RNB180-27	1"	28.0					
Cross-section: 240mm² A.W.G.: 400/500MCM I_{max}=470A Surface handling: Tin/3μ Annealing: Yes H=31.5 d1=24 D=32.6 T=3.9	M8	RNB200-8	5/16"	8.4	44.0	24.5	72.0			
	M10	RNB200-10	3/8"	10.5						
	M12	RNB200-12	1/2"	13.0						
	M14	RNB200-14	9/16"	15.0						
	M16	RNB200-16	5/8"	17.0						
	M18	RNB200-18	11/16"	19.0						
	M20	RNB200-20	3/4"	21.0						
Cross-section: 300mm² A.W.G.: 500/600MCM I_{max}=650A Surface handling: Tin/3μ Annealing: Yes H=35.5 d1=28 D=37.1 T=4.2	M22	RNB200-22	7/8"	23.0	44.0	37.5	91.0			
	M24	RNB200-24	15/16"	25.0						
	M27	RNB200-27	1"	28.0						
	M8	RNB325-8	5/16"	8.4				50.5	33.5	88.0
	M10	RNB325-10	3/8"	10.5						
M12	RNB325-12	1/2"	13.0							
M14	RNB325-14	9/16"	15.0							
M16	RNB325-16	5/8"	17.0							
Cross-section: 300mm² A.W.G.: 500/600MCM I_{max}=650A Surface handling: Tin/3μ Annealing: Yes H=35.5 d1=28 D=37.1 T=4.2	M18	RNB325-18	11/16"	19.0	50.5	45.0	105.7			
	M20	RNB325-20	3/4"	21.0						
	M22	RNB325-22	7/8"	23.0						
	M24	RNB325-24	15/16"	25.0						
	M27	RNB325-27	1"	28.0						

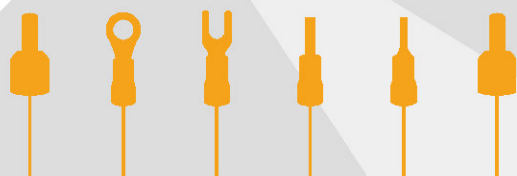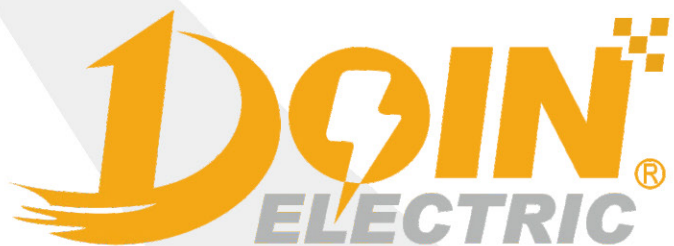

WENZHOU DEXIN ELECTRICTECHNOLOGY CO., LTD

www.doinele.com

Add: No.1888 Feihong S.Road, 325608 Wenzhou City, Zhejiang Provice R.P.C.