


# DOIN ELECTRIC




DEXIN ELECTRIC TECHNOLOGY



[www.doinele.com](http://www.doinele.com)

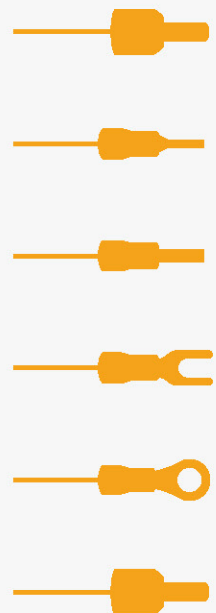

# Pre-insulated Blade terminals

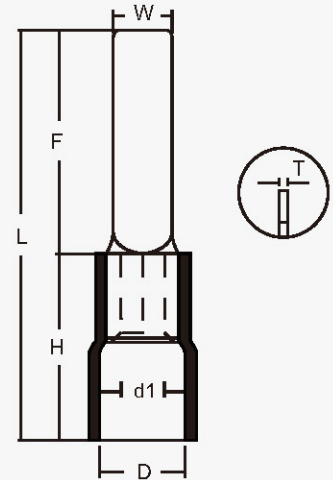

Available range	Single Grip	Double Grip	Dimensions(mm)		
			W	F	L
<b>Cross-section: 0.75-1.5mm<sup>2</sup></b> <b>A.W.G.: 22-16</b> <b>I<sub>max</sub>=19A</b> <b>Insulator colour: Red</b> <b>Surface handling: Tin / 3μ</b> <b>Annealing: Yes</b>	DBV1.25-9	DBVD1.25-9	2.8	9.0	18.8
	DBV1.25-10	DBVD1.25-10	2.8	10.0	19.8
	DBV1.25-11	DBVD1.25-11	3.0	11.0	20.8
	DBV1.25-13	DBVD1.25-13	3.0	13.0	22.8
	DBV1.25-14	DBVD1.25-14	3.0	14.0	23.8
	DBV1.25-18	DBVD1.25-18	3.0	18.0	27.8
 H=10.0 d1=1.7 D=4 T=0.75					
<b>Cross-section: 1.5-2.5mm<sup>2</sup></b> <b>A.W.G.: 16-14</b> <b>I<sub>max</sub>=27A</b> <b>Insulator colour: Blue</b> <b>Surface handling: Tin / 3μ</b> <b>Annealing: Yes</b>	DBV2-9	DBVD2-9	2.8	9.0	18.8
	DBV2-10	DBVD2-10	2.8	10.0	19.8
	DBV2-13	DBVD2-13	3.0	13.0	22.8
	DBV2-13L	DBVD2-13L	3.0		
	DBV2-14	DBVD2-14	3.0	14.0	23.8
	DBV2-18	DBVD2-18	3.0	18.0	27.8
H=10.0 d1=2.3 D=4.5 T=0.8					
<b>Cross-section: 4-6mm<sup>2</sup></b> <b>A.W.G.: 12-10</b> <b>I<sub>max</sub>=48A</b> <b>Insulator colour: Yellow</b> <b>Surface handling: Tin / 3μ</b> <b>Annealing: Yes</b>	DBV5.5-10	DBVD5.5-10	2.8	10.0	23.0
	DBV5.5-14	DBVD5.5-14	4.5	14.0	27.0
	DBV5.5-18	DBVD5.5-18	4.5	18.0	31.0
H=13.0 d1=3.4 D=6.4 T=1.0					

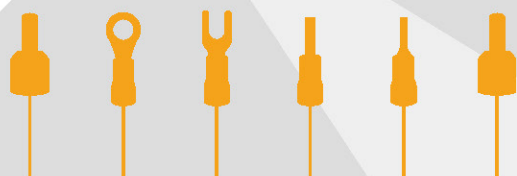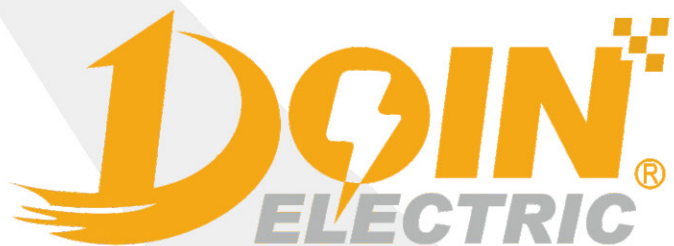

WENZHOU DEXIN ELECTRICTECHNOLOGY CO., LTD

---

[www.doinele.com](http://www.doinele.com)

Add: No.1888 Feihong S.Road, 325608 Wenzhou City, Zhejiang Provice R.P.C.