


DOIN ELECTRIC





DEXIN ELECTRIC TECHNOLOGY

www.doinele.com


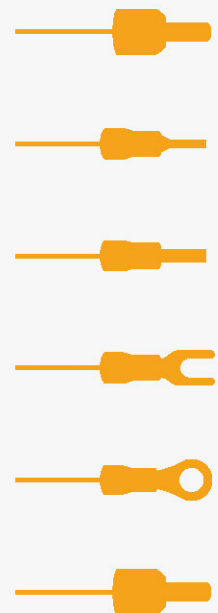


Non-insulated Cord end Ferrules

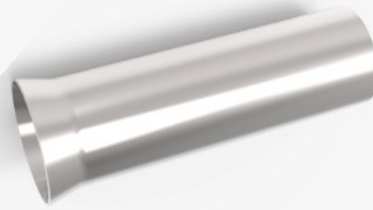

| Cross section (mm ²) | Item No. | Dimensions (mm) | | | | A.W.G |
|----------------------------------|----------|-----------------|-----|-----|-----|-------|
| | | L | W | D | C | |
| 0.25 | EN0206 | 6 | 1.5 | 1.1 | 0.8 | #26 |
| | EN0208 | 8 | | | | |
| 0.34 | EN0306 | 6 | 1.7 | 1.3 | 1.0 | #24 |
| | EN0308 | 8 | | | | |
| 0.5 | EN0506 | 6 | 1.9 | 1.5 | 1.2 | #22 |
| | EN0508 | 8 | | | | |
| | EN0510 | 10 | | | | |
| | EN0512 | 12 | | | | |
| 0.75 | EN7506 | 6 | 2.2 | 1.7 | 1.4 | #20 |
| | EN7508 | 8 | | | | |
| | EN7510 | 10 | | | | |
| | EN7512 | 12 | | | | |
| 1.0 | EN1006 | 6 | 2.5 | 2.0 | 1.7 | #18 |
| | EN1008 | 8 | | | | |
| | EN1010 | 10 | | | | |
| | EN1012 | 12 | | | | |
| | EN1018 | 18 | | | | |
| 1.5 | EN1508 | 8 | 3.3 | 2.6 | 2.3 | #16 |
| | EN1510 | 10 | | | | |
| | EN1512 | 12 | | | | |
| | EN1518 | 18 | | | | |
| 2.5 | EN2506 | 6 | 3.9 | 3.2 | 2.8 | #14 |
| | EN2508 | 8 | | | | |
| | EN2510 | 10 | | | | |
| | EN2512 | 12 | | | | |
| | EN2518 | 18 | | | | |
| 4 | EN4009 | 9 | 4.7 | 3.9 | 3.5 | #12 |
| | EN4012 | 12 | | | | |
| | EN4018 | 18 | | | | |
| 6 | EN6010 | 10 | 4.7 | 3.9 | 3.5 | #10 |
| | EN6012 | 12 | | | | |
| | EN6018 | 18 | | | | |

| Cross section (mm ²) | Item NO. | Dimensions (mm) | | | | A.W.G |
|----------------------------------|----------|-----------------|------|------|------|---------|
| | | L | W | D | C | |
| 10 | EN10-12 | 12 | 5.8 | 4.9 | 4.5 | #8 |
| | EN10-16 | 16 | | | | |
| | EN10-18 | 18 | | | | |
| | EN10-20 | 20 | | | | |
| | EN10-25 | 25 | | | | |
| 16 | EN16-12 | 12 | 7.2 | 6.2 | 5.8 | #6 |
| | EN16-16 | 16 | | | | |
| | EN16-18 | 18 | | | | |
| | EN16-20 | 20 | | | | |
| | EN16-22 | 22 | | | | |
| | EN16-25 | 25 | | | | |
| 25 | EN25-12 | 12 | 9.1 | 7.9 | 7.5 | #4 |
| | EN25-16 | 16 | | | | |
| | EN25-18 | 18 | | | | |
| | EN25-22 | 22 | | | | |
| 35 | EN35-16 | 16 | 10.2 | 8.7 | 8.3 | #2 |
| | EN35-20 | 20 | | | | |
| | EN35-25 | 25 | | | | |
| 50 | EN50-12 | 12 | 12.7 | 10.9 | 10.3 | #1 |
| | EN50-18 | 28 | | | | |
| | EN50-22 | 22 | | | | |
| | EN50-25 | 25 | | | | |
| 70 | EN70-22 | 22 | 15.8 | 14.3 | 13.5 | 2/0 |
| | EN70-25 | 25 | | | | |
| | EN70-32 | 32 | | | | |
| 95 | EN95-25 | 25 | 17.3 | 15.6 | 14.8 | 3/0 |
| | EN95-30 | 30 | | | | |
| | EN95-34 | 34 | | | | |
| 120 | EN120-30 | 30 | 20.2 | 17.7 | 16.7 | 4/0 |
| | EN120-34 | 34 | | | | |
| | EN120-38 | 38 | | | | |
| 150 | EN150-32 | 32 | 23.0 | 20.6 | 19.6 | 250/300 |
| | EN150-40 | 40 | | | | |
| 185 | EN185-32 | 32 | 23.9 | 21.4 | 20.2 | 300/350 |
| | EN185-40 | 40 | | | | |

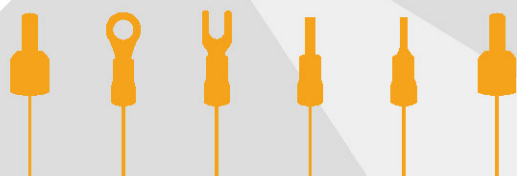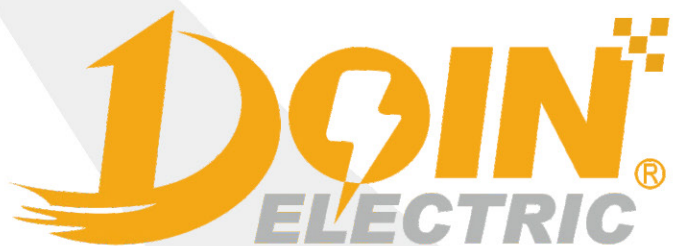

WENZHOU DEXIN ELECTRICTECHNOLOGY CO., LTD

www.doinele.com

Add: No.1888 Feihong S.Road, 325608 Wenzhou City, Zhejiang Provice R.P.C.